




<b>SERIE</b>	<b>B500   B5108</b>
<b>POWER</b>	10,8 W
<b>LUMEN</b>	1440 lm
<b>CREE COB</b>	350 mA - 37 V
<b>CRI / RA</b>	> 90




Der LED Einsatz eignet sich für alle Ringe und Rahmen der Serie B5 ...  
 Il modulo LED è adatto a tutti gli anelli e cornici della serie B5 ...


IES - LDT [Download](#) [Homepage](#)

Montageanleitung | Istruzioni montaggio [Download](#) [Homepage](#)

## OHNE NETZTEIL | SENZA ALIMENTATORE



Art. Nr.	W	Lm	K	Driver
B5108-27 30 35	10,8 W	1440	2700 K	/
B5108-30 30 35	10,8 W	1440	3000 K	/
B5108-40 30 35	10,8 W	1440	4000 K	/



Art. Nr.	W	Lm	K	Driver
B5108-27 50 35	10,8 W	1440	2700 K	/
B5108-30 50 35	10,8 W	1440	3000 K	/
B5108-40 50 35	10,8 W	1440	4000 K	/




## TRIAC DIM NETZTEIL | ALIMENTATORE TRIAC DIM

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-PE294B4233	12,80 W	200 - 240 VAc	/	25 - 37 VDC	330 mA	IP 20	-20 ... +60°C	115 x 40 x 26 mm	/

andere Dali/KNX Driver | altri Dali/KNX driver:  
 > Siehe [www.brilux.it/driver-dimmer](http://www.brilux.it/driver-dimmer) | visita [www.brilux.it/driver-dimmer](http://www.brilux.it/driver-dimmer)  
 > Siehe Seite 224-253 | Vedi pagina 224-253

## LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

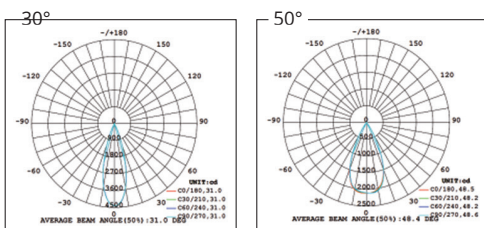

## DIMMER

Schalk	Universal Tastdimmer	ETD U2
	Regolatore a tasti universale	ETD 2E
Eltako	Universal-Dimmschalter	EUD61NPN-UC
	Dimmer universale elettronico	EUD12NPN-UC