




<b>SERIE</b>	<b>B500   B5132</b>
<b>POWER</b>	12,7 W
<b>LUMEN</b>	1320 lm
<b>CREE COB</b>	350 mA - 37 V
<b>CRI / RA</b>	> 90




Der LED Einsatz eignet sich für alle Ringe und Rahmen der Serie B5 ...  
Il modulo LED è adatto a tutti gli anelli e cornici della serie B5 ...

IES - LDT [Download](#) [Homepage](#)


Montageanleitung | Istruzioni montaggio [Download](#) [Homepage](#)



### MIT TRIAC DIM NETZTEIL | CON ALIMENTATORE TRIAC DIM




Art. Nr.	W	Lm	K	Driver
B5132-27 38 35ED	12,7 W	1320	2700 K	ED
B5132-30 38 35ED	12,7 W	1320	3000 K	ED
B5132-40 38 35ED	12,7 W	1320	4000 K	ED




Art. Nr.	W	Lm	K	Driver
B5132-27 60 35ED	12,7 W	1320	2700 K	ED
B5132-30 60 35ED	12,7 W	1320	3000 K	ED
B5132-40 60 35ED	12,7 W	1320	4000 K	ED

### OHNE NETZTEIL | SENZA ALIMENTATORE




Art. Nr.	W	Lm	K	Driver
B5132-27 38 35	12,7 W	1320	2700 K	/
B5132-30 38 35	12,7 W	1320	3000 K	/
B5132-40 38 35	12,7 W	1320	4000 K	/



Art. Nr.	W	Lm	K	Driver
B5132-27 60 35	12,7 W	1320	2700 K	/
B5132-30 60 35	12,7 W	1320	3000 K	/
B5132-40 60 35	12,7 W	1320	4000 K	/


### LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

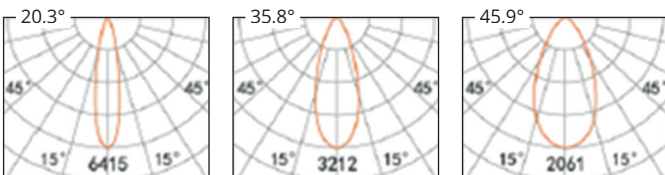

### DIMMER

Schalk	Universal Tastdimmer Regolatore a tasti universale	ETD U2
		ETD 2E
Eltako	Universal-Dimmschalter Dimmer universale elettronico	EUD61NPN-UC
		EUD12NPN-UC

### OPTIONAL | OPZIONALE



**B566-RR15**  
Reflektor | Riflettore 15°



**B566-RR25**  
Reflektor | Riflettore 25°



**B566-RR6004**  
Reflektor gold | Riflettore oro 60°