


LED EINSATZ | MODULO LED



SERIE	B500
POWER	6,8 W
LUMEN	657 lm
CREE COB	700 mA - 9 V
CRI / RA	> 90



Der LED Einsatz eignet sich für alle Ringe und Rahmen der Serie B5 ...
Il modulo LED è adatto a tutti gli anelli e cornici della serie B5 ...

IES - LDT


Download

Montageanleitung | Istruzioni montaggio


Download



MIT TRIAC DIM NETZTEILE | CON ALIMENTATORE TRIAC DIM




Art. Nr.	W	Lm	K	Driver
B566-27 38 70 ED	6,8 W	657	2700 K	ED
B566-30 38 70 ED	6,8 W	657	3000 K	ED
B566-40 38 70 ED	6,8 W	657	4000 K	ED




Art. Nr.	W	Lm	K	Driver
B566-27 60 70 ED	6,8 W	657	2700 K	ED
B566-30 60 70 ED	6,8 W	657	3000 K	ED
B566-40 60 70 ED	6,8 W	657	4000 K	ED

OHNE NETZTEIL | SENZA ALIMENTATORE




Art. Nr.	W	Lm	K	Driver
B566-27 38 70	6,8 W	657	2700 K	/
B566-30 38 70	6,8 W	657	3000 K	/
B566-40 38 70	6,8 W	657	4000 K	/



Art. Nr.	W	Lm	K	Driver
B566-27 60 70	6,8 W	657	2700 K	/
B566-30 60 70	6,8 W	657	3000 K	/
B566-40 60 70	6,8 W	657	4000 K	/


LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

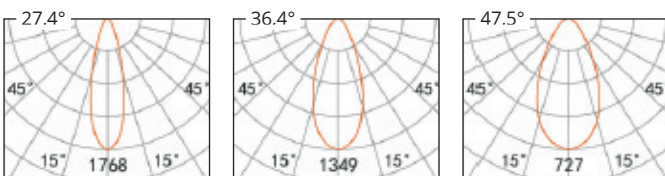

DIMMER MODELLE

Schalk	Universal Tastdimmer	ETD U2
	Regolatore a tasti universale	ETD 2E
Eltako	Universal-Dimmschalter	EUD61NPN-UC
	Dimmer universale elettronico	EUD12NPN-UC


OPTIONAL | OPZIONALE



B566-RR15
Reflektor | Riflettore 15°



B566-RR25
Reflektor | Riflettore 25°



B566-RR6 004
Reflektor gold | Riflettore oro 60°