


# IFO EINBAUSTRALER | SPOT INCASSO



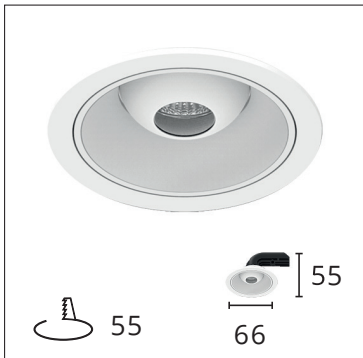


**SERIE B88-IFO**

**BEWEGLICH - ORIENTABILE**

**OHNE DRIVER - SENZA DRIVER**


**55 MM AUSSCHNITT - FORO 55 MM**

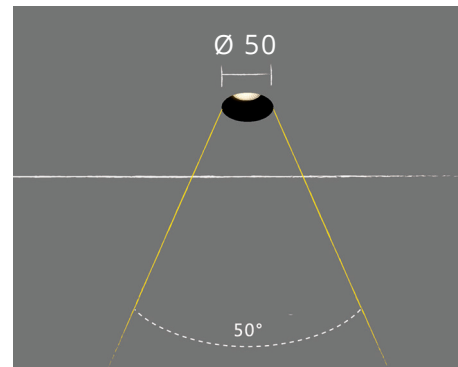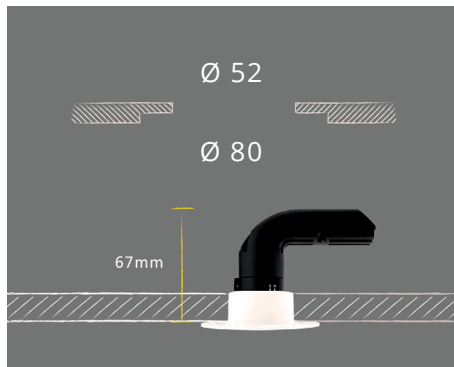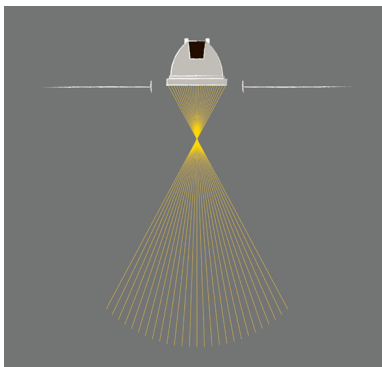

## EIGENSCHAFTEN | CARATTERISTICHE

Farbe Colore	Art. Nr.	W	CREE COB	LM	K	CRI RA	Optik	Driver	
○	B88-IFO3003	7,2 W	600 mA - 12 V	580 lm	3000 K	> 90	50°	/	50 mm
●	B88-IFO3005	7,2 W	600 mA - 12 V	580 lm	3000 K	> 90	50°	/	50 mm
●	B88-IFO28DTW05	5,4 W	350 mA - 18 V	754 lm	1800 - 3000 K Dim to warm	> 90	24°	/	50 mm

## LICHTVERTEILUNG DISTRIBUZIONE DELLA LUCE



## OPTIONAL: TRIMLESS EINBAURING | OPZIONALE: ANELLO INCASSO TRIMLESS

Farbe Colore	Art. Nr.	Einbau Installazione	Dimensions	
○	B501-TRR5003	Gips - Cartongesso	80 x 60 mm	53 mm

## PASSENDEN NETZTEIL | ALIMENTATORE ADATTO



Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-AL20MCH	8 - 20 W	220 - 240 VAc	/	3 - 42 Vdc	200 - 700 mA	IP 20	-10 ... +50°C	125 x 38 x 23 mm	25

Dali > siehe Netzteile | Dali > vedi alimentatori