

HLG DRIVER LED CV




SERIE HLG | B95-HLG

Ausgang: CV (Konstant-Spannung)

Uscita: CV (tensione costante)

LED Netzteil On / Off

LED Alimentatore On / Off

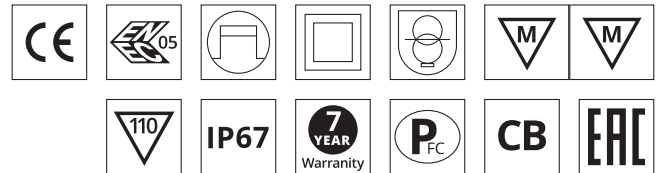

EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B95-HLG100H24	100 W	90 - 264 VAc	/	24 VDC	4 A	IP 67	-40 ... +80°C	220 x 68 x 38,8 mm	12
B95-HLG150H24	150 W	90 - 264 VAc	/	24 VDC	6,3 A	IP 67	-40 ... +80°C	228 x 68 x 38,8 mm	12
B95-HLG240H24	240 W	90 - 264 VAc	/	24 VDC	10 A	IP 67	-40 ... +90°C	244,2 x 68 x 38,8 mm	12
B95-HLG320H24	320 W	90 - 264 VAc	/	24 VDC	13,34 A	IP 67	-40 ... +90°C	252 x 90 x 43,8 mm	8
B95-HLG480H24	480 W	90 - 264 VAc	/	24 VDC	20 A	IP 67	-40 ... +90°C	262 x 125 x 43,8 mm	4
B95-HLG150H42A	150 W	90 - 264 VAc	/	42 VDC	3,6 A	IP 67	-40 ... +80°C	228 x 68 x 38,8 mm	12
B95-HLG100H48	100 W	90 - 264 VAc	/	48 VDC	2 A	IP 67	-40 ... +80°C	220 x 68 x 38,8 mm	12
B95-HLG150H48	150 W	90 - 264 VAc	/	48 VDC	3,2 A	IP 67	-40 ... +80°C	228 x 68 x 38,8 mm	12
B95-HLG240H48	240 W	90 - 264 VAc	/	48 VDC	5 A	IP 67	-40 ... +90°C	244,2 x 68 x 38,8 mm	12
B95-HLG320H48	320 W	90 - 264 VAc	/	48 VDC	6,7 A	IP 67	-40 ... +90°C	252 x 90 x 43,8 mm	8
B95-HLG480H48	480 W	90 - 264 VAc	/	48 VDC	10 A	IP 67	-40 ... +90°C	262 x 125 x 43,8 mm	4