

PCD TRIAC DIM DRIVER LED CC




SERIE PCD TRIAC DIM | B96-PCD

Ausgang: CC (Konstant-Strom)
Uscita: CC (corrente costante)

LED Netzteil On / Off | TRIAC DIM
LED Alimentatore On / Off | TRIAC DIM

Dimming Range 3 - 100 %

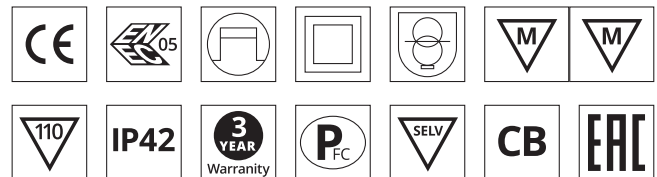

EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-PCD4035B	37,8 W	180 - 295 VAc	/	70 - 108 VDC	350 mA	IP 42	-40 ... +50°C	128 x 60 x 31,5 mm	30
B96-PCD4070B	39,9 W	180 - 295 VAc	/	34 - 57 VDC	700 mA	IP 42	-40 ... +50°C	128 x 60 x 31,5 mm	30

DIMMER MODELLE

LUTRON	SKYLARK	CLIPSAL	32E450UDM
	SF-12P-277	CLIPSAL	NO 32E450TM
LUTRON	DVF-103P-277	CLIPSAL	NO 32E450LM
JUNG	Licht-Management	CLIPSAL	Cat 400T
	225 TDE		
JUNG	Licht-Management		
	225 NV DE		
BERKER	Tronic-Drehdimmer		
	286710		

MONTAGEANLEITUNG | ISTRUZIONI MONTAGGIO

