

# XLG DRIVER LED CV



LED LIGHTING



## SERIE XLG | B96-XLG


**Ausgang: CV (Konstant-Spannung)**

Uscita: CV (tensione costante)

**LED Netzteil On / Off**

LED Alimentatore On / Off

Mit PFC attivo

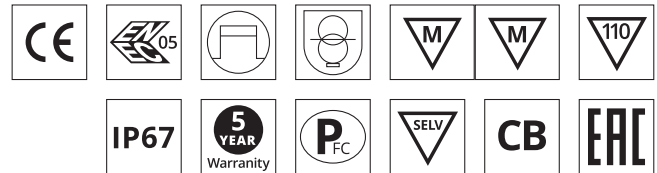

## EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-XLG7524A	75 W	105 - 305 VAc	/	24 VDc	3,12 A	IP 67	-40°C ... +90°C	140 x 63 x 32 mm	24
B96-XLG10024A	100 W	105 - 305 VAc	/	24 VDc	4,16 A	IP 67	-40°C ... +90°C	140 x 63 x 32 mm	24
B96-XLG15024A	150 W	105 - 305 VAc	/	24 VDc	6,25 A	IP 67	-40°C ... +90°C	180 x 63 x 35,5 mm	16
B96-XLG20024A	200 W	105 - 305 VAc	/	24 VDc	8,3 A	IP 67	-40°C ... +90°C	199 x 63 x 35,5 mm	16
B96-XLG10048A	100 W	105 - 305 VAc	/	48 VDc	2 A	IP 67	-40°C ... +90°C	140 x 63 x 32 mm	24
B96-XLG15048A	150 W	105 - 305 VAc	/	48 VDc	3,12 A	IP 67	-40°C ... +90°C	180 x 63 x 35,5 mm	16
B96-XLG24048A	240 W	105 - 305 VAc	/	48 VDc	5 A	IP 67	-40°C ... +90°C	199 x 63 x 35,5 mm	16