


SP TRIAC DIM DRIVER LED CV

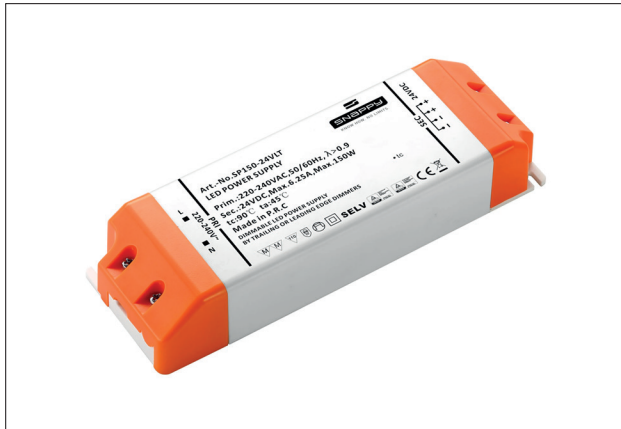

SERIE SP TRIAC DIM | B95-SP ... 24 VDC

Ausgang: CV (Konstant-Spannung)
 Uscita: CV (tensione costante)

LED Netzteil On / Off | TRIAC DIM
 LED Alimentatore On / Off | TRIAC DIM

Dimming Range 10 - 100 %



EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B95-SP100-24VLT	100 W	220 - 240 VAc	/	24 VDC	4,16 A	IP 20	-20 ... +45°C	201 x 63 x 30 mm	25
B95-SP150-24VLT	150 W	220 - 240 VAc	/	24 VDC	6,25 A	IP 20	-20 ... +45°C	195 x 68 x 32 mm	15

DIMMER MODELLE

Schneider	SBD200LED	Busch Jäger	6513U-120
Schneider	ELG174111	Busch Jäger	6523U
Schneider	ELG174121	Busch Jäger	6517U-101
GIRA	0307 00/102	Merten	MEG5134-0000
Feller	40.200LED		
Schalk	ETD U2		
Schalk	ETD 2E		

MONTAGEANLEITUNG | ISTRUZIONI MONTAGGIO

